

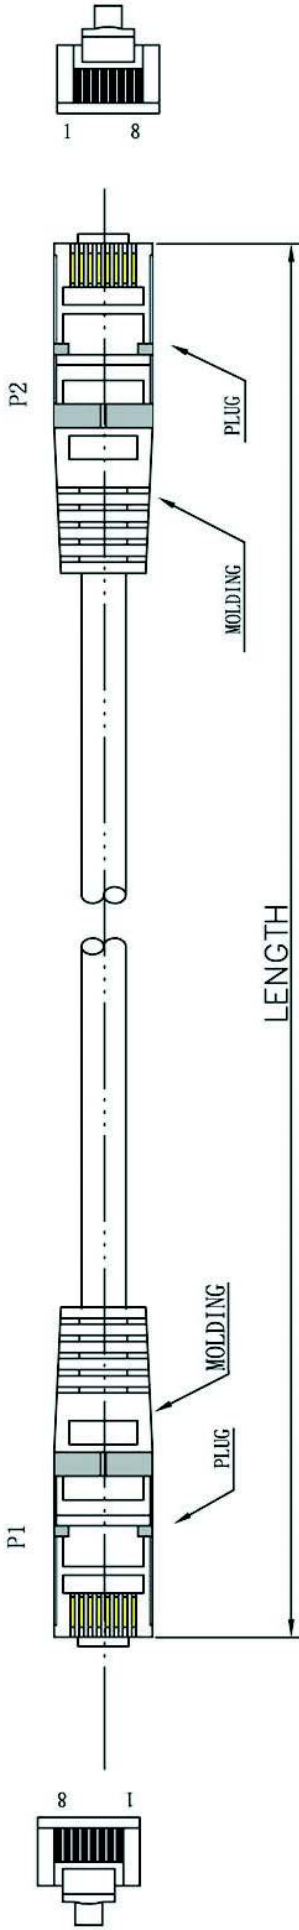


DATE	REV	DESCRIPTION	BY	CHKD
10/27	A/O	NEW		




Marking:<LP009> FTP CAT.5E PATCH ISO/IEC 11801 & EN 50288 3P VERIFIED FOR
GIGABIT ETHERNET 26AWGX4P TYPE CM (UL) C(UL) CMH E164469-F3

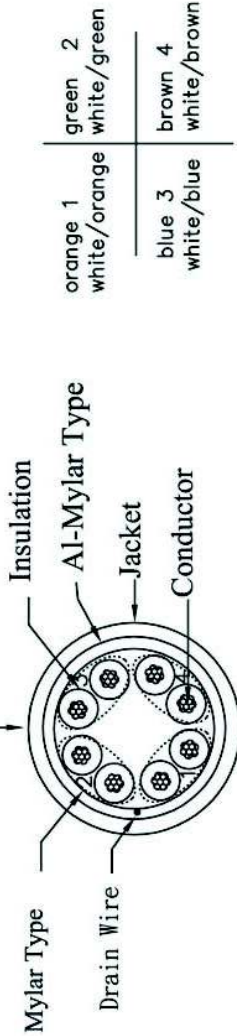

Conductor	Bare Copper
Insulation	26AWG 7/0.152±0.005mm
Jacketing	Thickness: MIN at any point 0.15mm MAX AVG 0.25mm Diameter: 0.85±0.06mm
PVC	Thickness: MIN at any point 0.50mm MAX AVG 0.60mm Diameter: 5.6±0.2mm

WIRE	CAT.5E FTP STR 26AWG
PLUG	YS-01
Length	1.0M
WIRE COLOR	GY825

ROHS Compliant

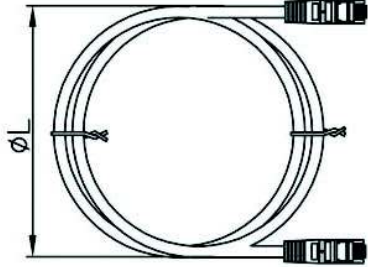

Unless specified on the drawing, tolerances are per the follows:

.X ± 1
± 0.2
.XX ± 0.05



PINOUT		WIRE	
PA/R	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
	3	WHT/GRN	3
2	6	GRN	6
	4	BLU	4
3	5	WHT/BLU	5
	7	WHT/BRN	7
4	8	BRN	8

DRAW.NO	ITEM	EUT-701	
DEPARTMENT	R&D	DRAW	DATE
SCALE	CHECKER	CHECKER	2008/10/27
UNIT	MM	SHEET	APPROVAL
3RD	1	OF	1